

FARETTI LED – SPOT LED



A



RoHS



BF1C – BF1F

Faretto led alta luminosità da incasso orientabile corpo alluminio 5W

Recessed spot led high brightness adjustable aluminium body 5W

CODE	V _{ac}	POWER W	N° LED	Lm	COLOR	H mm	D mm	TC °k
BF1C	230	5	1	730	WARM	70	135	3000
BF1F	230	5	1	780	COLD	70	135	6000



A



RoHS



BF2C – BF2N – BF2F

Faretto led alta luminosità da incasso down-light corpo alluminio 18W

Recessed spot led high brightness down-light aluminium body 18W

CODE	V _{Dc}	POWER W	N° LED	Lm	COLOR	H mm	D mm	TC °k
BF2C	12	18	1	1300	WARM	90	182	3000
BF2N	12	18	1	1350	NATUR	90	182	4500
BF2F	12	18	1	1400	COLD	90	182	6000



A



RoHS



BF3C – BF3N – BF3F

Faretto led alta luminosità da incasso down-light corpo alluminio 30W

Recessed spot led high brightness down-light aluminium body

CODE	V _{Dc}	POWER W	N° LED	Lm	COLOR	H mm	D mm	TC °k
BF3C	12	30	1	2000	WARM	111	220	3000
BF3N	12	30	1	2200	NATUR	111	220	4500
BF3F	12	30	1	2400	COLD	111	220	6000

FARETTI LED – SPOT LED



BF4C – BF4F

Faretto led con attacco MR16, lente da 40°

Spot led with MR16 plug, 40° lens

CODE	V Dc	POWER W	PLUG	IP	COLOR	H x D mm	Lm	TC °k	CRI
BF4C	12	6	MR16	44	WARM	45x50	350	3000	>80
BF4F	12	6	MR16	44	COLD	45x50	410	6000	>80



BF5C - BF5N - BF5F

Modulo AR111 a luce riflessa con un led COB apertura fascio 20°

AR111 LED light reflection with one COB led beam angle 20°

CODE	V dc	POWER W	N° LED	IP	COLOR	D mm	lm	TC °k	H mm
BF5C	12	15	1	20	WARM	111	780	3000	85
BF5N	12	15	1	20	NATUR	111	800	4500	85
BF5F	12	15	1	20	COLD	111	820	6000	85






BF6C - BF6N - BF6F

Modulo AR111 a luce riflessa con un led COB apertura fascio 40°

AR111 LED light reflection with one COB led beam angle 40°

CODE	V dc	POWER W	N° LED	IP	COLOR	D mm	lm	TC °k	H mm
BF6C	12	17	1	20	WARM	111	1150	3000	85
BF6N	12	17	1	20	NATUR	111	1200	4500	85
BF6F	12	17	1	20	COLD	111	1250	6000	85

FARETTI LED – SPOT LED



BF19C – BF19N – BF19F

Faretto led attacco GU10, lente da 40°

Spot led GU10 plug, 40° lens

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	H x D mm	Lm	TC °k	CRI
BF19C	220	7	GU10	20	WARM	54x50	550	3000	>80
BF19N	220	7	GU10	20	NATUR	54x50	580	4500	>80
BF19F	220	7	GU10	20	COLD	54x50	610	6000	>80




BF9C - BF9N - BF9F


Faretto led ultra piatto con interruttore touch integrato

Ultra-slim spot led with integrated touch switch

CODE	V _{dc}	POWER W	N° LED	IP	COLOR	H mm	D mm	TC °k	CHIP
BF9C	12	2,8	36	20	WARM	7	68	3000	Bridgelux
BF9N	12	2,8	36	20	NATUR	7	68	4500	Bridgelux
BF9F	12	2,8	36	20	COLD	7	68	6000	Bridgelux

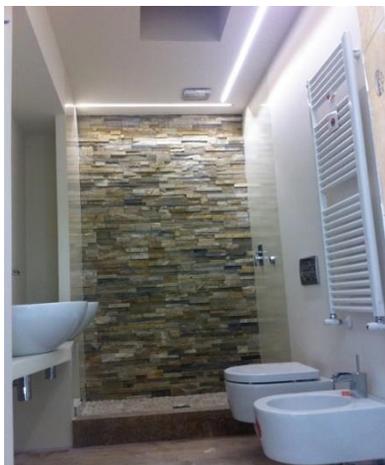

FARETTI LED – SPOT LED

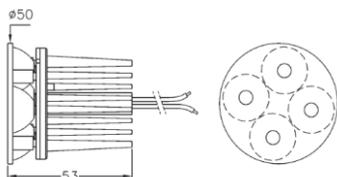

A



RoHS


PF
≥0.9

BF7C - BF7N - BF7F

Modulo MR16 completo di lente e dissipatore con 3 led SEUL

MR16 led module with lens and heatsink with 3 SEUL leds

CODE	I mA	POWER W	N° LED	IP	COLOR	D mm	lm	TC °k	CHIP
BF7C	350	7,5	3	20	WARM	50	735	3000	SEUL
BF7N	350	7,5	3	20	NATUR	50	735	4500	SEUL
BF7F	350	7,5	3	20	COLD	50	735	6000	SEUL

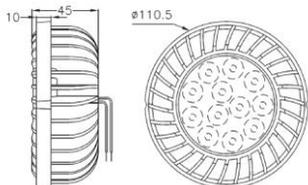

A



RoHS

PF
≥0.9

BF8C - BF8N - BF8F

Modulo AR111 completo di lente e dissipatore con 12 led SEUL

AR111 LED module with lenses and heatsink with 12 SEUL led

CODE	I mA	POWER W	N° LED	IP	COLOR	D mm	lm	TC °k	H mm
BF8C	350	15	12	20	WARM	110	1680	3000	45
BF8N	350	15	12	20	NATUR	110	1680	4500	45
BF8F	350	15	12	20	COLD	110	1680	6000	45



FARETTI LED – SPOT LED




A++



BF10C

Modulo led 1W, colore grigio
fissaggio a scatto lente da 65°
Fornito con cavo da 120 cm e
connettore maschio

*1W LED module, silver gray color,
push button anchoring with 65° lens.
120 cm cable with male plug*

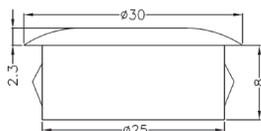

CODE	I mA	POWER W	N° LED	IP	COLOR	D x H mm	lm	TC °k
BF10C	350	1,4	1	20	WARM	30x8	80	3000




A++



BF11C

Modulo led 1W, colore grigio
fissaggio a scatto lente da 65°
Fornito con cavo da 120 cm e
connettore maschio

*LED module 1W, silver gray color,
push button fixing with 65° beam
angle. 120 cm cable with male plug*



CODE	I mA	POWER W	N° LED	IP	COLOR	D x H mm	lm	TC °k
BF11C	350	1,4	1	20	WARM	30x13	80	3000




A++



BF12C




Modulo led 1W, colore trasparente
fissaggio a scatto lente da 65°
Fornito con cavo da 120 cm e
connettore maschio

*LED module 1W, transparent color,
push button anchoring with 65° beam
angle. 120 cm cable with male plug*



CODE	I mA	POWER W	N° LED	IP	COLOR	D x H mm	lm	TC °k
BF12C	350	1,4	1	20	WARM	30x13	80	3000

FARETTI LED – SPOT LED

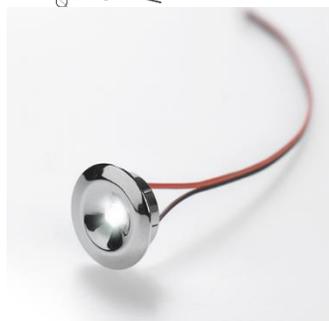

A



BF13C – BF13F

Faretto ad incasso con LED 5mm montato su cover in metallo trattato e verniciato color cromo. Indicato per decorazioni a cielo stellato cavo 1,5m

Recessed spot LED 5mm cover treated and Chrome painted suitable for decoration or starry sky cable 1,5m

CODE	V _{dc}	POWER _W	N° LED	IP	COLOR	H _{mm}	D _{mm}	TC ^{°k}
BF13C	3,2	0,1	1	44	WARM	35	12	3000
BF13F	3,2	0,1	1	44	COLD	35	12	6000

A



BF14C – BF14N – BF14F

Faretto incasso con POWER LED seul P4-07 montato su corpo in policarbonato color cromo

Recessed spot with POWER LED Seul P4-07, treated chrome polycarbonate body.

CODE	I _{mA}	POWER _W	N° LED	IP	COLOR	H _{mm}	D _{mm}	TC ^{°k}
BF14C	350	1	1	40	WARM	10,5	32	3000
BF14N	350	1	1	40	NATUR	10,5	32	4500
BF14F	350	1	1	40	COLD	10,5	32	6000

A



BF15C – BF15N – BF15F

Faretto incasso quadrato con POWER LED Seul P4-07 montato su corpo in policarbonato color cromo

Recessed square spot with POWER LED Seul P4-07 treated chrome polycarbonate body.

CODE	I _{mA}	POWER _W	N° LED	IP	COLOR	H _{mm}	L x P _{mm}	TC ^{°k}
BF15C	350	1	1	40	WARM	19	32x32	3000
BF15N	350	1	1	40	NATUR	19	32x32	4500
BF15F	350	1	1	40	COLD	19	32x32	6000

FARETTI LED – SPOT LED



BFCL1

Modulo quadrato ad incasso con cornice a lampade basculanti
Lampada AR111 non inclusa

*Square recessed downlight with frame for tilting lamps.
AR111 lamp not included*

CODE	PLUG	Color	LAMP	IP	MAT	L x P mm	H mm
BFCL1	G53	Grey	AR111	20	Met/All	338x181	87



BF16C – BF16N – BF16F

Faro led da incasso per controsoffitto con 1 led COB orientabile a 360° orizzontalmente e 90° verticalmente

Recessed spot led for false ceiling with 1 COB led directable 360° horizontally and 90° vertically


CODE	V Ac	POWER W	N° LED	IP	COLOR	H mm	D mm	TC °k
BF16C	220	30	1	40	WARM	185	126	3000
BF16N	220	30	1	40	NATUR	185	126	4500
BF16F	220	30	1	40	COLD	185	126	6000



BF17M

Faretto ad incasso RGB con LED 5mm montato su cover in metallo trattato e verniciato. Indicato per decorazioni a cielo stellato cavo 1,5m

Recessed spot RGB LED 5mm cover treated and painted suitable for decoration or starry sky cable 1,5m



CODE	POWER W	N° LED	IP	COLOR	H mm	D mm	TC °k
BF17M	3	1	40	RGB	52	32	MULTI

LAMPADINE LED – LED BULBS



A



BL42C

Lampadina a filamento led angolo di apertura fascio luminoso 320° 2W

Led filament bulb angle light beam 320° 2W

CODE	V _{ac}	POWER W	N° LED	PLUG	Lumen	H mm	D mm	TC °k
BL42C	230	2	2	E14	210	100	35	3000



A



BL421C

Lampadina a filamento led a fiamma angolo di apertura fascio luminoso 320° 2W

Led filament bulb flame angle light beam 320° 2W

CODE	V _{ac}	POWER W	N° LED	PLUG	Lumen	H mm	D mm	TC °k
BL421C	230	2	2	E14	210	110	35	3000



A




BL44C – BL46F – BFL44F – BFL46F

Lampadina led angolo di apertura fascio luminoso 120°

Led bulb angle light, beam angle 120°

CODE	V _{ac}	POWER W	N° LED	PLUG	Lumen	H mm	Diam mm	TC °k
BL44C	230	4	4	E14	350	100	35	3000
BL46C	230	6	6	E14	470	100	35	3000
BL44F	230	4	4	E14	350	100	35	6000
BL46F	230	6	6	E14	470	100	35	6000

LAMPADINE LED – LED BULBS



A




BL56C – BL56N – BL56F

Lampadina led attacco E27 angolo di apertura fascio luminoso 210° 6W

Led bulb angle light E27 plug, beam angle 210° 6W

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	L x D mm	Lm	TC °k	CRI
BL56C	220	6	E27	20	WARM	75x45	460	3000	>80
BL56N	220	6	E27	20	NATUR	75x45	470	4500	>80
BL56F	220	6	E27	20	COLD	75x45	480	6000	>80

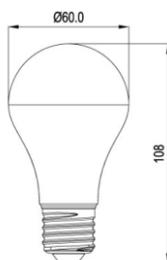

A




BL512C – BL512N – BL512F

Lampadina led attacco E27 angolo di apertura fascio luminoso 210° 12W

Led bulb angle light E27 plug beam angle 210° 12W

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	L x D mm	Lm	TC °k	CRI
BL512C	220	12	E27	20	WARM	108x60	1030	3000	>80
BL512N	220	12	E27	20	NATUR	108x60	1040	4500	>80
BL512F	220	12	E27	20	COLD	108x60	1050	6000	>80



A




BL520C – BL520N – BL520F

Lampadina led attacco E27 angolo di apertura fascio luminoso 210° 20W

Led bulb angle light E27 plug beam angle 210° 20W

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	L x D mm	Lm	TC °k	CRI
BL520C	220	20	E27	20	WARM	136x80	1600	3000	>80
BL520N	220	20	E27	20	NATUR	136x80	1700	4500	>80
BL520F	220	20	E27	20	COLD	136x80	1800	6000	>80

LAMPADINE LED – LED BULBS



A




BL510C – BL510N – BL510F

Lampadina led attacco E27 angolo di apertura fascio luminoso 210° 10W

Led bulb angle light E27 plug beam angle 210° 10W

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	L x D mm	Lm	TC °k	CRI
BL510C	220	10	E27	20	WARM	133x95 780	3000		>80
BL510N	220	10	E27	20	NATUR	133x95 810	4500		>80
BL510F	220	10	E27	20	COLD	133x95 860	6000		>80

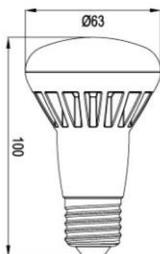

A




BL58C – BL58N – BL58F

Lampadina led attacco E27 angolo di apertura fascio luminoso 210° 8W

Led bulb angle light E27 plug beam angle 210° 8W

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	L x D mm	Lm	TC °k	CRI
BL58C	220	8	E27	20	WARM	100x63 490	3000		>80
BL58N	220	8	E27	20	NATUR	100x63 500	4500		>80
BL58F	220	8	E27	20	COLD	100x63 510	6000		>80

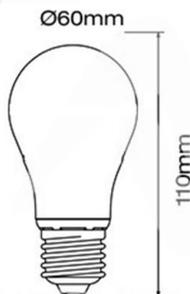

A




BL5A6C – BL5A8C

Lampadina a filamento led attacco E27 angolo di apertura fascio luminoso 320°

Led filament bulb angle E27 plug light beam 320°

CODE	V _{ac}	POWER W	PLUG	IP	COLOR	L x D mm	Lm	TC °k	CRI
BL5A6C	220	6	E27	20	WARM	110x60 650	3000		>80
BL5A8C	220	8	E27	20	WARM	110x60 850	3000		>80

LAMPADINE LED – LED BULBS

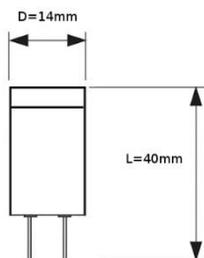

A



BL12C – BL12F

Lampadina a led G4 con SMD
protezione in silicone 2W

G4 SMD Led bulb, silicon cap 2W

CODE	V _{dc}	POWER W	Lm	IP	COLOR	H mm	D mm	TC °k
BL12C	12	2	150	44	WARM	40	14	3000
BL12F	12	2	110	44	WARM	40	14	6000


A



BL1AC - BL1AN - BL1A4F

Lampadina a led G9 con COB led
angolo di apertura fascio 120° 4W

*G9 Led bulb with COB led beam angle
120° 4W*



CODE	V _{ac}	POWER W	Lm	IP	COLOR	H mm	D mm	TC °k
BL1A4C	230	4	320	44	WARM	60	18	3000
BL1A4N	230	4	320	44	NATUR	60	18	4500
BL1A4F	230	4	340	44	COLD	60	16	6000


A



BL1C3 – BL1C5

Lampadina a led G9 con SMD
protezione in silicone

G9 SMD Led bulb, silicone cap



CODE	V _{ac}	POWER W	Lm	IP	COLOR	H mm	D mm	TC °k
BL1C3	230	3	210	44	WARM	33	16	3000
BL1C5	230	5	410	44	WARM	39	16	3000