



## Approval Marks



## Certified

EN 61347-1  
EN 61347-2-13

## Electronic


Parameter	Conditions	Min	Nom	Max	Unit
I/P Voltage Range		198	230	264	Vac
Input Frequency		47		63	Hz
Output Power		0		60	W
Input Current			330m		mA
Output Voltage			12		V
Output Current	25°C, Nominal Input	0		5	A
Power Factor(Full Load)	High Power Factor		0.95		
Line Regulation		-2		2	%
Load Regulation	25°C, Nominal Input	-2		2	%
Output Voltage Accuracy	25°C, Nominal Input	-2		2	%
Protection	Overload Protection				
	Short Circuit Protection(Auto-Restart)				
	Over Heat Protection				
Ambient Temp.		-20		+50	°C

Lamp Type **Normal LED**

## Application Space


Indoor Use  
(Low Humidity, No Condensation)

## Wiring Diagram

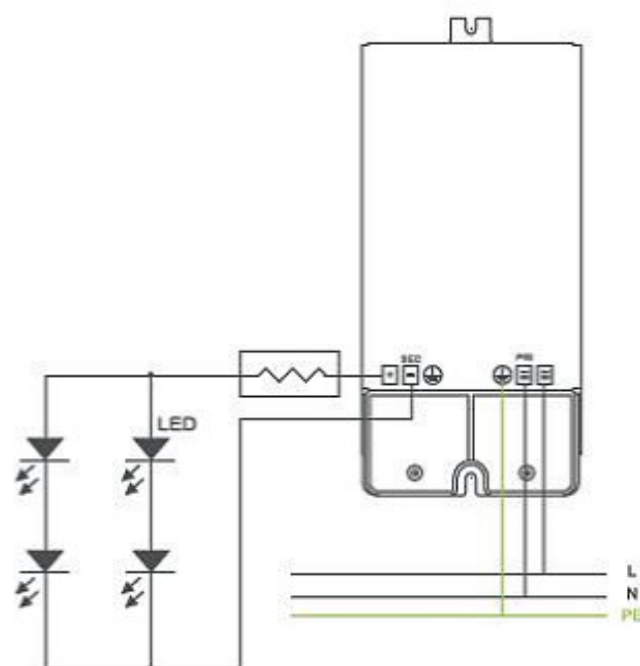

## Physical

Parameter

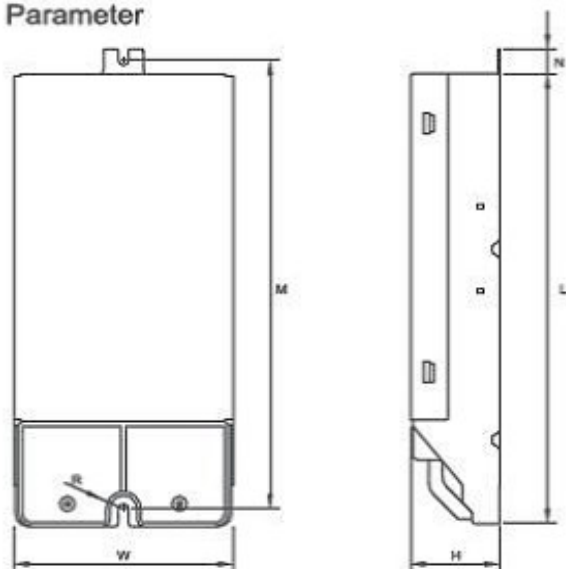

L : 180 mm    H : 35.5 mm  
M : 179.8 mm    K  
N : 9.8 mm    R : 2.1 mm  
W : 88 mm    Slot On One Side Allowing Alignment : M+/-3 mm

Terminal Block : Screw Type Terminal  
Housing Material : Metal, No Sharp Edges  
Soldering : Lead-Free, Comply With RoHS  
Label : Surface Print