


# STRISCE LED RIGIDE – RIGID LED STRIPES


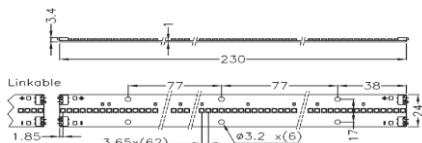


## BRS1C - BRS1N - BRS1F

Circuito da 63 LED 3528 con connettori per il collegamento in serie max 10 pezzi

*LED circuit 63 led 3528 linkable for series connection, max 10 pcs*

CODE	V <sub>dc</sub>	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BRS1C	24	5	63	20	WARM	230	400	3000	24 x 4
BRS1N	24	5	63	20	NATUR	230	450	4500	24 x 4
BRS1F	24	5	63	20	COLD	230	500	6000	24 x 4

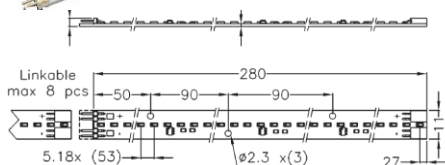
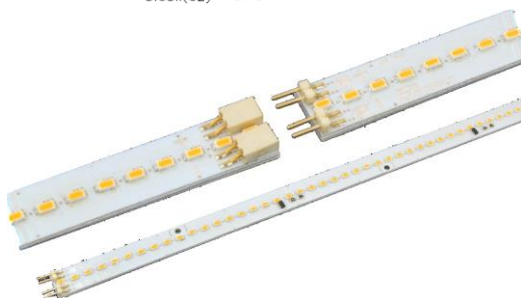


## BRS2C - BRS2N - BRS2F

Circuito da 54 LED 3014 con connettori per il collegamento in serie max 56W

*LED circuit 54 led 3014 linkable for series connection, max 56W*

CODE	V <sub>dc</sub>	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BRS2C	24	7	54	20	WARM	280	400	3000	11 x 3
BRS2N	24	7	54	20	NATUR	280	450	4500	11 x 3
BRS2F	24	7	54	20	COLD	280	500	6000	11 x 3

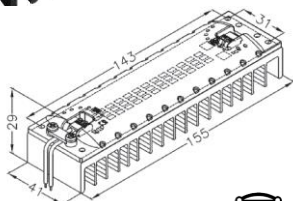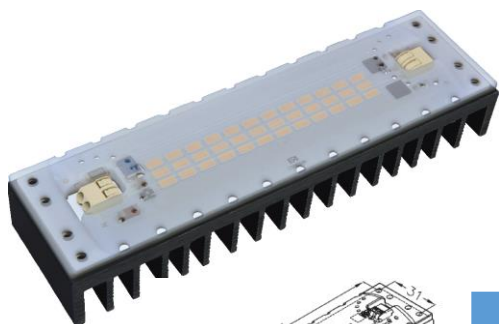

## BRS4C - BRS4N - BRS4F

Circuito led 230V 36 led 5630 con filtro di rete integrato e connettori in/out per connessione in serie

*Led circuit 230V, 36 LED 5630 with integrated line filter and in/out snap-in connector for serial connection*

CODE	V <sub>ac</sub>	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BRS4C	230	14	36	20	WARM	155	1400	3000	11 x 3
BRS4N	230	14	36	20	NATUR	155	1500	4500	11 x 3
BRS4F	230	14	36	20	COLD	155	1550	6000	11 x 3